


Typ: type: type:	Gehäuse: case: boîte:	Austauschtyp: cross reference part: pièce d'échange:	Gehäuse: case: boîte:	Bemerkung: note: remarque:
2N3904	TO-92	BC546	TO-92	3)
2N4403	TO-92	BC327	TO-92	3)
2N5060	TO-92	2N5061/2N5064	TO-92	1)
2N3584	TO-66	BUT11A	TO-220	2)
SE9302	TO-220	TIP120	TO-220	1)
LM 323	TO-3	MA7805	TO-3	1)
MAC38-2	TO-208	TIC263C	SOT-93	5)
MPSU45	TO-202	TIP120	TO-22	4)


1) 1:1 Austauschtyp, keine Modifikation – 1:1 replacement, no changes needed  
remplacement 1:1, pas des changements!

2) Wie im Bild dargestellt einlöten! - See picture – Voyez l'image!



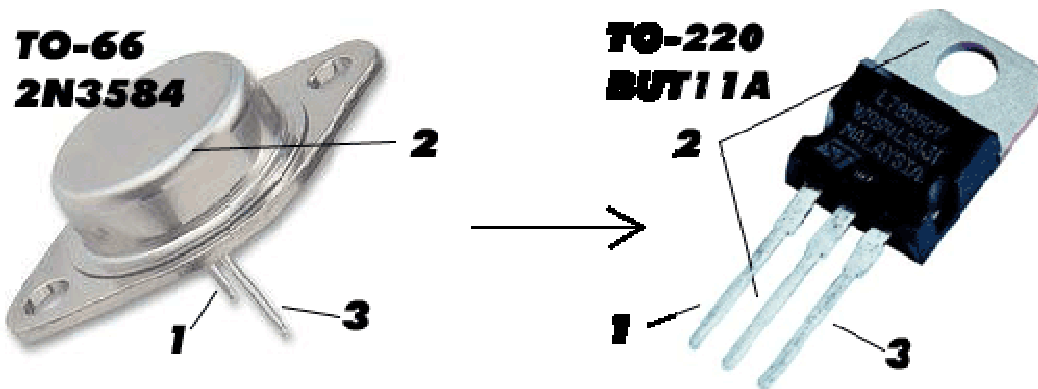

3) Bauteil um 180° versetzt einlöten! – Turn transistor before soldering! – tournez le transistor avant vous soudez!

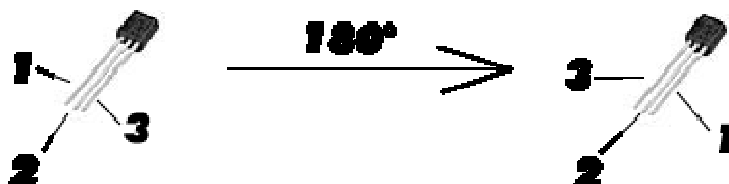

4) Bein 2 und 3 tauschen – change pin 2 and 3 – changez la patte 2 et 3!



5) Für Bally Elektra - pour Bally Elektra - for Bally Elektra (MAC38-2 → TIC263)

